


Bednorz Protector K

Effective safety at work



Bednorz Protector K

The **Bednorz Protector K** has been developed to ensure the safe removal of bolt seals. When they are cut, fragments can fly off, potentially endangering personnel and equipment. The user-friendly **Bednorz Protector K** prevents uncontrolled movement of the severed parts, which reduces the potential for accidental injury or damage. After cutting, both parts of the seal remain securely attached to the Bednorz Protector K, making them easy to inspect, dispose of or store. Damage caused by any sharp seal fragments, e.g. to HGV tyres, will also be avoided.

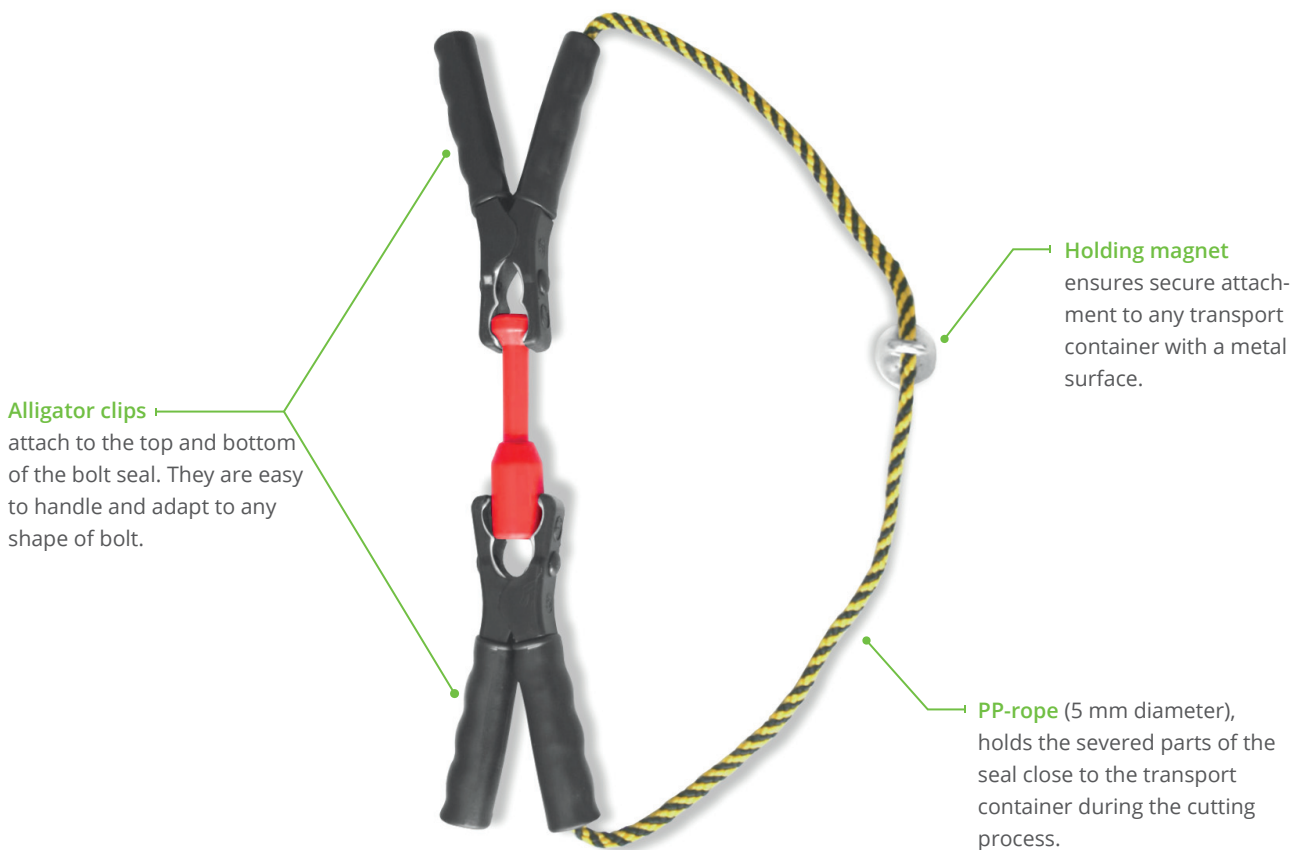

Technical data

Clips:	galvanised steel, plastic-coated
Magnet:	diameter 20 mm, holding force 100 N
Cable:	polypropylene, black-yellow, Ø 5 mm
Cable length:	approx. 500 mm
Total length:	approx. 750 mm
Weight:	approx. 200 g
Item code:	3.00.200.5

Made in Germany

How to use

- 1 Attach magnet to metal surface of container or truck door.
Affix one alligator clip of the Bednorz Protector K to the top of the bolt seal and one to the bottom.



- 2 This photograph shows a correctly fitted Bednorz Protector K.




- 3 The bolt seal can now be cut safely with bolt cutters.



- 4 The fragments of the bolt seal remain reliably secured by the two alligator clips.



- 5 Both seal parts can now be easily removed.

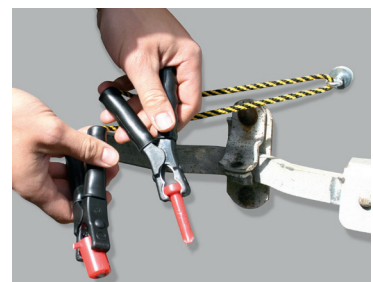



Bednorz GmbH & Co. KG
Am Aspenhaag 5
D - 65451 Kelsterbach

Postfach 11 18
D - 65440 Kelsterbach
www.bednorz.com

Fon: +49 (0) 6107 - 60 33
Fax: +49 (0) 6107 - 62 49 7
Mail: info@bednorz.com